



UL924-listed by Underwriters Laboratories Inc

**Photoluminescent Permalight® Plastic
EXIT Sign inside Aluminum Frame
50-foot viewing distance**

Item-No:	Description:	Dimensions:
	<p>50 foot viewing distance energy-efficient Permalight® Photoluminescent Plastic EXIT Sign inside Aluminum Frame: Each sign consists of</p> <ul style="list-style-type: none">• an aluminum frame• one photoluminescent plastic panel with the EXIT legend• 2 same-colored peel-and-stick chevrons• Accessories for flat wall mount included. <p>The installer determines on-site whether the location requires just the sign with its EXIT legend; or if the location requires pointing in an exit direction, the installer applies the directional chevron(s) over the alignment dots.</p>	
600126	Green EXIT on photoluminescent yellowish plastic panel inside Silver-colored anodized Aluminum Frame	9 inches tall 14-5/8 inches wide
600127	Red EXIT on photoluminescent yellowish plastic panel inside Silver-colored anodized Aluminum Frame	
		
600128	DOUBLE-sided Green EXIT on photoluminescent yellowish plastic panel inside Silver-colored anodized Aluminum Frame	9 inches tall 14-5/8 inches wide
600129	DOUBLE-sided Red EXIT on photoluminescent yellowish plastic panel inside Silver-colored anodized Aluminum Frame	

**Double-sided Signs inside Frame need a Bracket:
Choose from ACCESSORIES 600055, 600056, 600057**

UL924-listed by Underwriters Laboratories Inc	Photoluminescent Permalight® Plastic EXIT Sign inside Aluminum Frame 50-foot viewing distance
-----------------------------------------------	----------------------------------------------------------------------------------------------------------------

600111	Green EXIT on photoluminescent yellowish plastic panel inside Black Aluminum Frame	9 inches tall 14-5/8 inches wide
600113	Red EXIT on photoluminescent yellowish plastic panel inside Black Aluminum Frame	
		
600112	DOUBLE-sided Green EXIT on photoluminescent yellowish plastic panel inside Black Aluminum Frame	9 inches tall 14-5/8 inches wide
600114	DOUBLE-sided Red EXIT on photoluminescent yellowish plastic panel inside Black Aluminum Frame	
<p style="text-align: center;">Double-sided Signs inside Frame need a Bracket: Choose from ACCESSORIES 600055, 600056, 600057</p>		

Compliances

<p>Photoluminescent Exit Sign</p> <ul style="list-style-type: none"> ✓ In compliance with IBC and IFC codes ✓ In compliance with NFPA 101-<i>Life Safety Code</i> Before installation it must be determined that there is a minimum of 5 fc (54 lux) of fluorescent illumination on the face of the sign at all times of building occupancy. ✓ OSHA compliant ✓ UL924 listed by Underwriters Laboratories Inc ✓ Accessories for flat wall mount INCLUDED in sign package. <u>OPTIONALLY available:</u> Three Bracket length – see ACCESSORIES ✓ Listed for high-location and floor-proximity installation = impact resistance tested by UL !

UL924-listed by Underwriters Laboratories Inc

**Photoluminescent Permalight® Plastic
EXIT Sign inside Aluminum Frame
50-foot viewing distance**

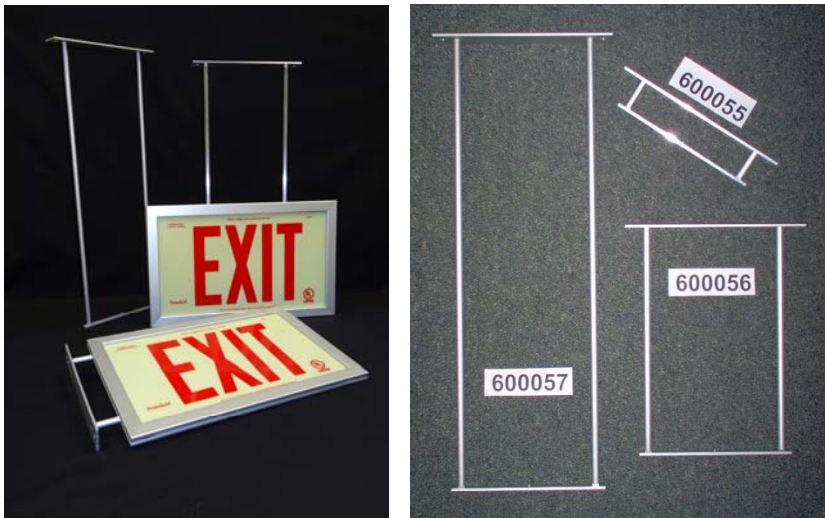
Plastic inside Aluminum Frame Exit Sign Benefits

- No energy consumption: no electricity cost; green design
- No maintenance: no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Easily movable should egress routing change
- Durable Plastic inside sturdy Metal Frame
- Consistent, uniform EXIT legend illumination
- Visible at 50 feet
- Recyclable Plastic inside recyclable Aluminum Frame
- LEED points qualified

Item-No:

Plastic in Alu Framed Sign Accessories:

Dimensions:

Item-No:	Plastic in Alu Framed Sign Accessories:	Dimensions:
600055	Accessories for Photoluminescent Framed Plastic EXIT Sign: Bracket for Ceiling or Perpendicular (side wall) Mount 	1.5 inches away from Ceiling or Side Wall
600056	Bracket for 10 inch EXTENDED Ceiling Mount	10 inches away from the Ceiling
600057	Bracket for 19.5 inch EXTENDED Ceiling Mount	19.5 inches away from the Ceiling