
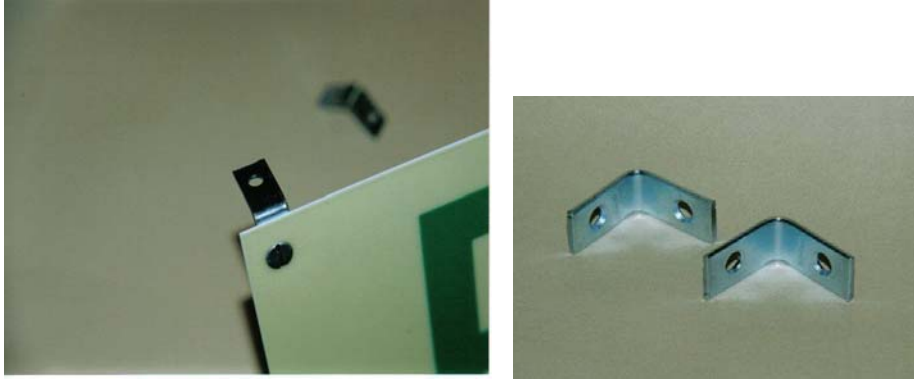


UL924-listed by Underwriters Laboratories Inc

**Photoluminescent UNFRAMED Plastic
EXIT Sign
50-foot viewing distance**

Item-No:	Description:	Dimensions:
	<p>50 foot viewing distance energy-efficient Photoluminescent unframed Plastic EXIT Sign:</p> <p>Each sign comes with two self-adhesive chevron stickers. The installer determines on-site whether the location requires just the sign with its EXIT legend; or if the location requires pointing in an exit direction, the installer applies the directional chevron(s) over the alignment dots.</p>	
600117	Green EXIT legend on photoluminescent yellowish plastic backing panel	7-11/16 inches tall
600118	Red EXIT legend on photoluminescent yellowish plastic backing panel	13 inches wide
	 <p>Also available DOUBLE-sided: A double-sided Sign requires One Set of 2 Mounting Clips.</p>	Each sign has four holes. Hole diameter: ~3/16 inch
600120	Double-sided Green EXIT legend on photoluminescent yellowish plastic backing panel	7-11/16 inches tall
600121	Double-sided Red EXIT legend on photoluminescent yellowish plastic backing panel	13 inches wide

<p>600123</p>	<p>OPTIONAL ACCESSORY: Two L-shaped Mounting Clips (screws not included)</p> 	<p>1-inch x 1-inch each</p>
----------------------	---	---------------------------------

Compliances

Photoluminescent Exit Sign

- ✓ In compliance with IBC and IFC codes
- ✓ In compliance with NFPA 101-*Life Safety Code*
Before installation it must be determined that there is a minimum of 5 fc (54 lux) of fluorescent illumination on the face of the sign at all times of building occupancy.
- ✓ OSHA 1910.37(b)(6) compliant: Each exit sign must be illuminated to a surface value of at least five foot-candles (54 lux) by a reliable light source and be distinctive in color. PERMALIGHT® exit signs are NEITHER self-luminous nor electroluminescent.
- ✓ GSA Facilities Standard P100 compliant.
- ✓ UL924-listed by Underwriters Laboratories Inc
- ✓ Four Holes for flat wall mount.
OPTIONALLY available if a single-sided sign shall be hung from the ceiling:
Necessary for a double-sided sign: One Set of 2 L-shaped Mounting Clips (Item-No.: 600123).
- ✓ Listed for high-location and floor-proximity installation = impact resistance tested by UL!

Plastic Exit Sign Benefits

- No energy consumption: no electricity cost; green design
- No maintenance: no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Easily movable should egress routing change
- Durable metal with permanent printed design
- Consistent, uniform EXIT legend illumination
- Visible at 50 feet
- Recyclable Plastic
- LEED points qualified
- Low Cost