

- Save Lives
- Save Energy
- Save Money

PERMALIGHT® photoluminescent exit signs are your NON-electric and NON-radioactive exit sign solution.



### Compliances:

- » IBC – International Building Code
- » IFC – International Fire Code
- » NFPA 101-Life Safety Code
- » NFPA 5000 – Building Construction and Safety Code
- » The Joint Commission (TJC), formerly JCAHO-Joint Commission on the Accreditation of Healthcare Organizations
- » OSHA 1910.37 (b)(6)
- » UL924 listed for high-location and floor proximity use!
- » UL924 listed for the United States and Canada

### GO GREEN – save energy! Gain valuable LEED project points!

LEED, the Leadership in Energy and Environmental Design Green Building Rating System™ is the nationally accepted benchmark for the design, construction and operation of high performance green buildings. Please visit: [www.usgbc.org](http://www.usgbc.org)  
Possible LEED project credits are categories EA1, MR4 and ID1.1.

### Benefits at a glance

- |  |   |
|--|---|
| » <b>Non-electrical</b>                  | → Easy do-it-yourself installation using a screw driver.<br>No electrician needed.        |
| » <b>Non-radioactive, Non-toxic</b>      | → No radioactive waste recycling fees, as you have with self-luminous tritium EXIT signs. |
| » <b>No light bulbs to change</b>        | → Maintenance free for 25+ years. No expiration date.                                     |
| » <b>Explosion-proof</b>                 | → Also suited for higher risk environments.   |
| » <b>No energy consumption</b>           | → Savings on your electricity bill.   |
| » <b>3 different materials available</b> | → Plastic, aluminum and acrylic.  |
| » <b>Impact resistant</b>                | → Suited for high-location and floor proximity installation.                              |

### Energy-efficient Photoluminescent EXIT Signs

By NFPA and ICC-codes, exit signs shall be listed in accordance with UL924 *Standard for Emergency Lighting* and function for 90 minutes in case of primary power loss.

PERMALIGHT® Photoluminescent EXIT signs were tested by Underwriters Laboratories and ETL Intertek Testing respectively in compliance with UL924, listed for both the United States and Canada.

Activated by 5 foot-candles (54 lux) of ambient fluorescent lighting at all times of building occupancy, PERMALIGHT® UL924-EXIT signs remain legible for 90 minutes after normal lighting has failed, and continue to emit their declining luminance for several days.

### Plastic EXIT Signs: the affordable solution



**Simply practical:** Each sign comes with two self-adhesive chevron stickers. Your advantage: just order the total number of signs needed and attach the desired directional indicator when it comes time to install the sign on-site. There is no need to specify the direction beforehand.



#### RIGID PVC PLASTIC Sign, UNFRAMED with 4 holes

Description	Dimensions	Item No.
<b>UL924-LISTED EXIT SIGN:</b> unframed, for flat wall installation		
6" letters EXIT in <b>GREEN</b>	7 11/16" x 13"	600117
6" letters EXIT in <b>RED</b>	7 11/16" x 13"	600118
<b>DOUBLE-SIDED UNFRAMED EXIT SIGN</b> (needs clips 600123)		
6" letters EXIT in <b>GREEN</b>	7 11/16" x 13"	600120
6" letters EXIT in <b>RED</b>	7 11/16" x 13"	600121




#### RIGID PVC PLASTIC Sign inside silver colored BRUSHED ALUMINUM FRAME (flat wall mount accessories included)

Description	Dimensions	Item No.
<b>UL924-LISTED EXIT SIGN in BRUSHED ALU FRAME</b>		
ONE 6" green EXIT sign in <b>BRUSHED ALU FRAME</b>	9" x 14 5/8"	600126
ONE 6" red EXIT sign in <b>BRUSHED ALU FRAME</b>	9" x 14 5/8"	600127
DOUBLE-sided 6" green EXIT in <b>BRUSHED ALU FRAME</b> (needs a bracket)		600128
DOUBLE-sided 6" red EXIT in <b>BRUSHED ALU FRAME</b> (needs a bracket)		600129



#### RIGID PVC PLASTIC Sign inside BLACK ALUMINUM FRAME (flat wall mount accessories included)

Description	Dimensions	Item No.
<b>UL924-LISTED EXIT SIGN in BLACK ALUMINUM FRAME</b>		
ONE 6" green EXIT sign in <b>BLACK FRAME</b>	9" x 14 5/8"	600111
ONE 6" red EXIT sign in <b>BLACK FRAME</b>	9" x 14 5/8"	600113
DOUBLE-sided 6" green EXIT sign in <b>BLACK FRAME</b> (needs a bracket)		600112
DOUBLE-sided 6" red EXIT sign inside <b>BLACK FRAME</b> (needs a bracket)		600114

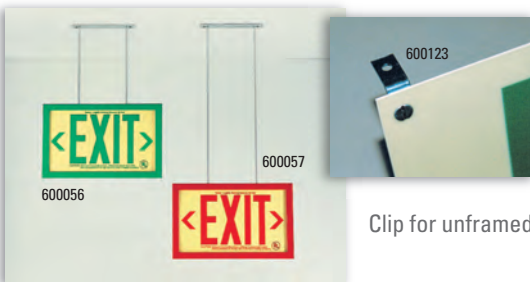

#### Brackets for framed Signs and Clips for unframed Signs

Description	Dimensions	Item No.
Two L-shaped Mounting Clips for one unframed Sign	1" x 1"	600123
BRACKET for Ceiling or Perpendicular Mount	1.5"	600055
BRACKET for 10" EXTENDED Ceiling Mount	10"	600056
BRACKET for 19.5" EXTENDED Ceiling Mount	19.5"	600057

### » NFPA, IBC and state building code compliant

UL924-compliance tested by Underwriters Laboratories Inc for the United States & Canada.

Viewing Distance: 50 feet. Activation: minimum 5 fc = 54 lux of fluorescent lighting.

### ALUMINUM EXIT Signs: especially durable!

For tough environments, like areas with high-pressure steam cleaning, select PERMALIGHT® aluminum EXIT signs. Light weight yet durable, the Aluminum EXIT signs are available unframed with four mounting holes or inside same-colored Aluminum frame with a range of mounting accessories.



#### Colored ALUMINUM Panel in matching colored ALUMINUM FRAME:

Unit consists of 5 panels: center panel with photoluminescent EXIT letters, 2 colored side panels and 2 optional directional indicator panels < >.



600055 Bracket inside  
600026 Framed Sign

Description	Dimensions	Item No.
Red Panels in Red Frame, EXIT with two optional directional indicators	10 1/4" x 18 3/4"	600025
Green Panels in Green Frame, EXIT with two optional directional indicators	10 1/4" x 18 3/4"	600026
Black Panels in Black Frame, EXIT with two optional directional indicators	10 1/4" x 18 3/4"	600027
Also available Double-sided: Plus one of the following brackets to hang signs		
BRACKET for Ceiling or Perpendicular Mount		600055
BRACKET for 10" EXTENDED Ceiling Mount		600056
BRACKET for 19.5" EXTENDED Ceiling Mount		600057



600123 Clip installed on  
600001 Unframed Sign

#### Colored ALUMINUM Panel, UNFRAMED with 4 holes

with photoluminescent EXIT letters and photoluminescent directional indicators < >.

Description	Dimensions	Item No.
Red panel, wording EXIT	8 1/2" x 17"	600001
Red panel, wording <EXIT		600002
Red panel, wording EXIT>		600003
Red panel, wording <EXIT>		600004
Green panel, wording EXIT	8 1/2" x 17"	600005
Green panel, wording <EXIT		600006
Green panel, wording EXIT>		600007
Green panel, wording <EXIT>		600008
Also available Double-sided:	contact us	
Two L-shaped Mounting Clips for unframed signs	1" x 1"	600123

### » NFPA, IBC and state building code compliant

UL924-compliance tested by ETL Intertek Testing for the United States & Canada.

Viewing Distance: 50 feet. Activation: min. 5 fc = 54 lux of fluorescent lighting.

### Acrylic EXIT Signs: elegant design!

#### » NFPA, IBC and state building code compliant

UL924-compliance tested by ETL Intertek Testing for the United States & Canada.

Viewing Distance: 50 feet. Activation: min. 5 fc = 54 lux of fluorescent lighting.




#### The right accessories for optimal mounting



Easy assembly with aluminum barrels



Item No. 600058  
4 stand-off barrels for wall mount



Item No. 600059  
Wire suspension set

#### Elegant ACRYLIC Panel with opaque background and photoluminescent directional indicators < >



Description UNFRAMED	Dimensions	Item No.
Red background, wording EXIT	8 3/4" x 17 1/4"	600031
Red background, wording <EXIT		600032
Red background, wording EXIT>		600033
Red background, wording <EXIT>		600034
Green background, wording EXIT	8 3/4" x 17 1/4"	600035
Green background, wording <EXIT		600036
Green background, wording EXIT>		600037
Green background, wording <EXIT>		600038
Black background, wording EXIT	8 3/4" x 17 1/4"	600039
Black background, wording <EXIT		600040
Black background, wording EXIT>		600041
Black background, wording <EXIT>		600042
OPTIONAL: Set of 4 Stand-Off Barrels for protruding wall installation	1"	600058
OPTIONAL: Wire Suspension Set to hang sign up to 24" from ceiling	24"	600059

### Outdoor / Wet Locations / 100-foot Viewing Distance EXIT Signs:

Listed to Standard UL924 by ETL Intertek Testing for high-location and floor-proximity installation. Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 fc (54 lux) of fluorescent light on the sign face(s) at all times of building occupancy. UL924-listed for **outdoor/wet locations**.

**NEW**



Description	Dimensions	Item No.
<b>RED ABS Plastic Panel</b> with Photoluminescent Letters 2 Directional Chevrons (field-applied) Designed for surface, flag, ceiling or conduit mounting (Mounting Bracket included)	8-5/8" x 15-7/8" x 3/4"	600100R
Double-sided EXIT sign	8-5/8" x 15-7/8" x 3/4"	600100R-DB
<b>GREEN ABS Plastic Panel</b> with Photoluminescent Letters 2 Directional Chevrons (field-applied) Designed for surface, flag, ceiling or conduit mounting (Mounting Bracket included)	8-5/8" x 15-7/8" x 3/4"	600100G
Double-sided EXIT sign	8-5/8" x 15-7/8" x 3/4"	600100G-DB
<b>BLACK ABS Plastic Panel</b> with Photoluminescent Letters 2 Directional Chevrons (field-applied) Designed for surface, flag, ceiling or conduit mounting (Mounting Bracket included)	8-5/8" x 15-7/8" x 3/4"	600100B
Double-sided EXIT sign	8-5/8" x 15-7/8" x 3/4"	600100B-DB